



公司简介 Company Profile

About us:



Ningbo Nour Lighting Technology Co.,Ltd is a dynamic company who is committed to development and manufacturing of Lighting Products since 2015.

In 2018, inspired by solar lighting products, we also got involved in Solar System and Solar-related products backed up by a professional team.

Thanks to our global partners, who helped us gain lots of experience, we push our limits of lighting designs and technology to best provide expert solutions to our customers, in return.

We introduce new products every quarter to enrich our category and help customers gain value in the competitive market.

We have very complete testing facilities to ensure every item is strictly tested according to customer requirements or to our rigid Quality Control system.

Testing Equipment:



Optical Test system (integrating sphere)



EMC Lab



EMC Test Lab




Chip Mounting



Testing Equipment:



Photometric Performance

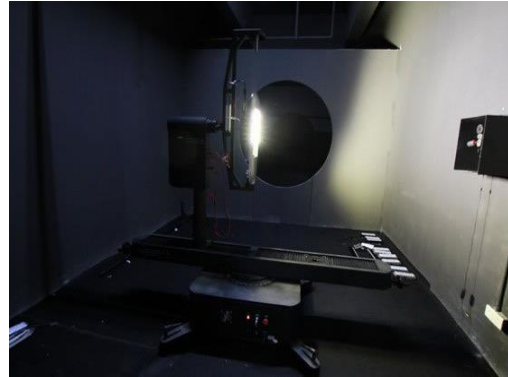

Distribution of Photometric(IES)

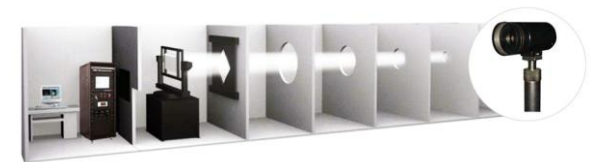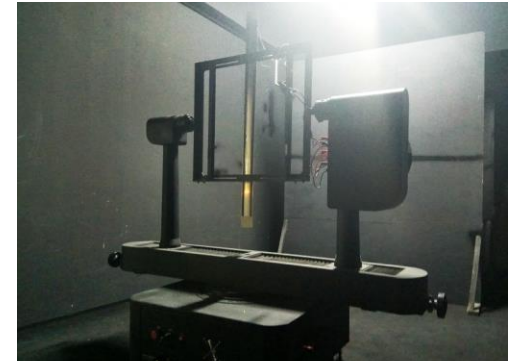

Distribution of Photometric



Programmable Chamber of
Temperature & Humidity

Testing Equipment:



Salt Spray Tester



Glow-wire Tester




Needle-flame Tester



UV Accelerated Aging Tester



Auto Wear-resisting Tester

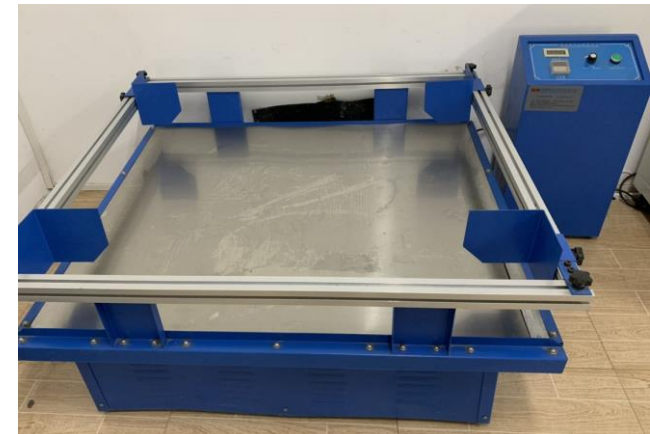

Box Dropping Tester

Aging Test Equipment:



High Temp Aging Shock Tester



LED Chip & Driver Tester




Lifetime Tester

Production Facilities:



Aging Lines

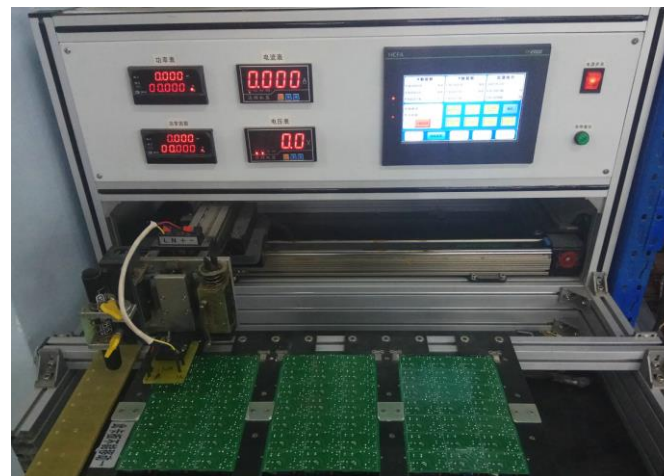

LED Driver
Auto Tester

Technical Facilities:




Static Tester



Shock & Surge Tester



LED Driver General Tester

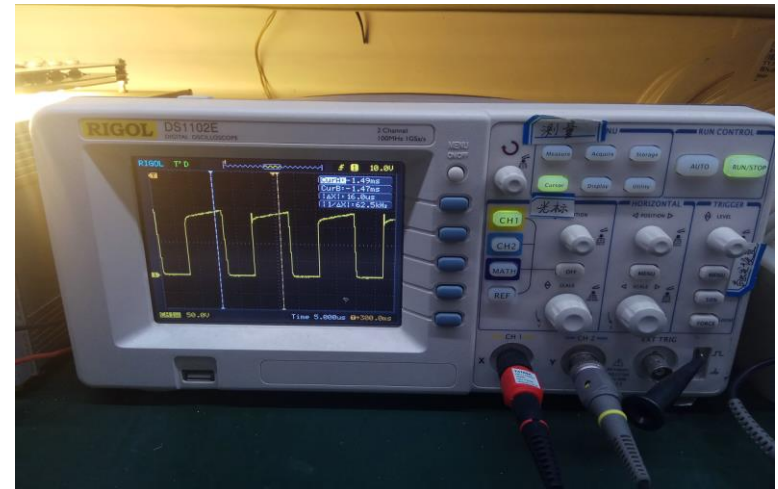

THD Tester

Technical Facilities:



LCR Tester



Multi-channel Temp.
Tester



Torque Tester



Wire Tension Tester



LED Chip Aging Tester

Production:



Production lines; Stock Area



Packaging &
Box Dropping test

Production:




Powder –coating Workshop



Assembly Lines



Hardware Workshop

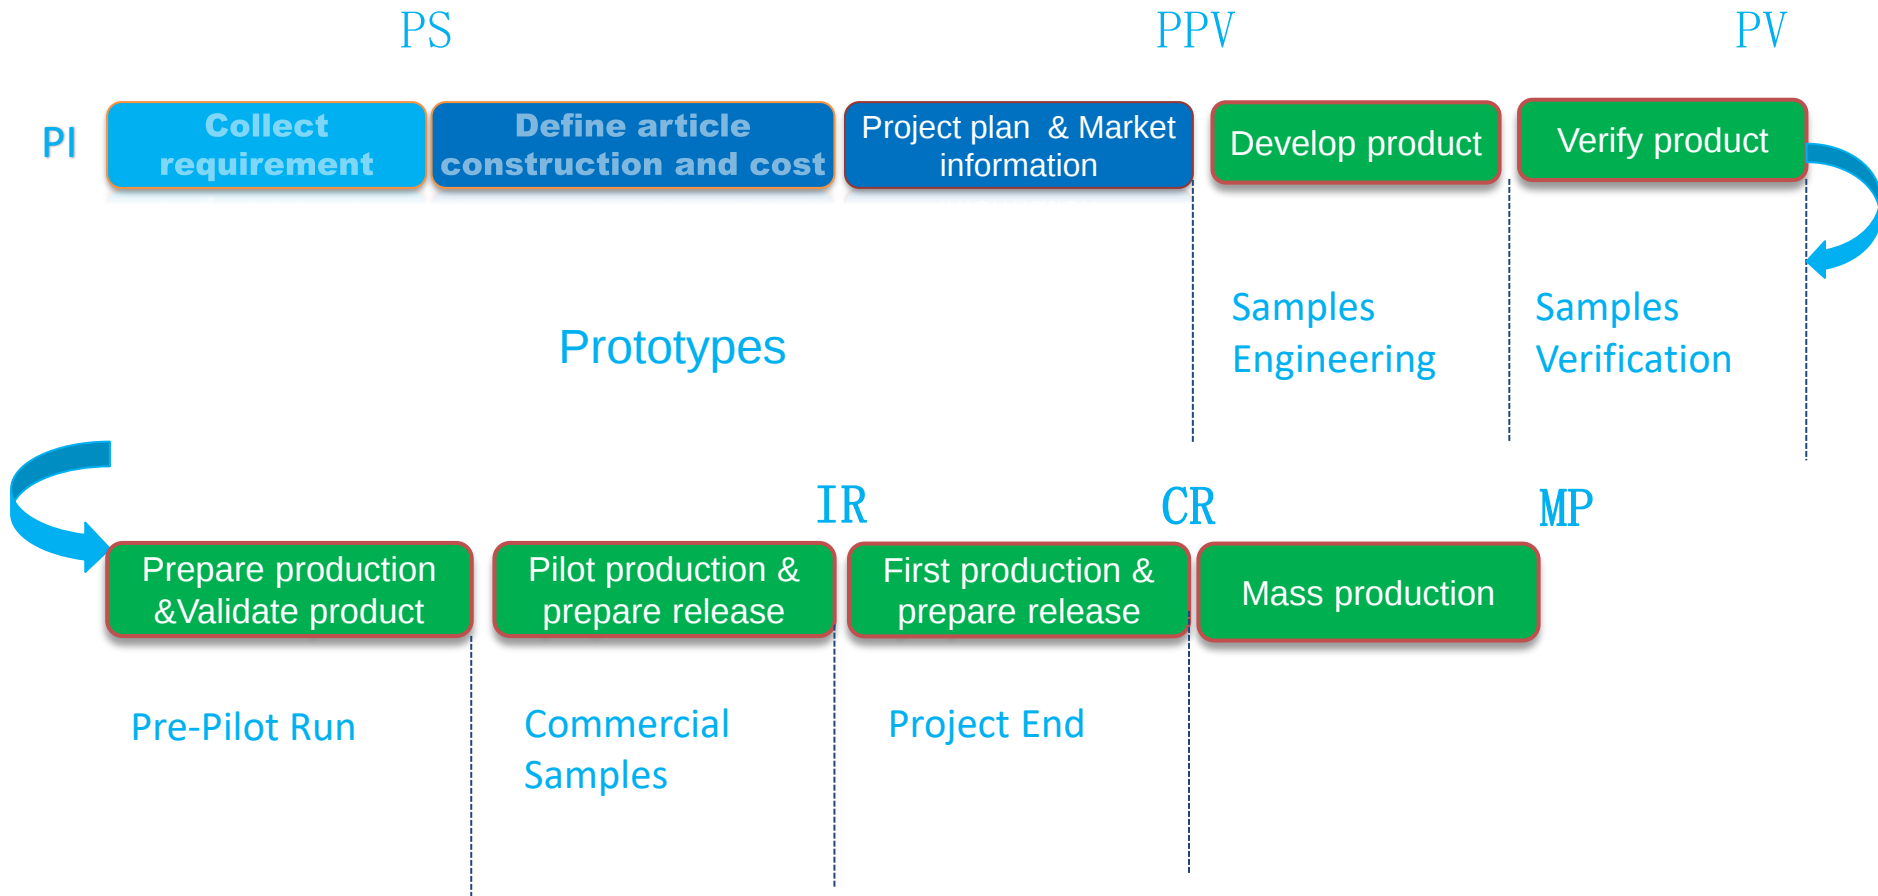

Contents

- 1. LED Tube. [\(Page 14-18\)](#)
- 2. LED Tri-proof lamp. [\(Page 19-21\)](#)
- 3. LED Linear Light. [\(Page 22-25\)](#)
- 4. LED Panel Light. [\(Page 26-37\)](#)
- 5. LED Ceiling Light. [\(Page 38-39\)](#)
- 6. LED Office lighting. [\(Page 38-39\)](#)
- 7. LED UFO High Bay [\(Page 40\)](#)
- 8. LED Flood Light. [\(Page 41-43\)](#)

Aluminum & PC



T8 LED Tube **60cm**

Power: 9W

Lumen: 100lm-150lm/W

Voltage: 100-277V/185-265V

CRI >80 PF>0.90/0.5

T8 LED Tube **120cm**

Power: 18W

Lumen: 100lm-150lm/W

Voltage: 100-277V/185-265V

CRI >80 PF>0.90/0.5

T8 LED Tube **150cm**

Power: 24W

Lumen: 100lm-150lm/W

Voltage: 100-277V/185-265V CRI > 80 PF>0.90/0.5

T8 LED Tube **240cm**

Power: 36W

Lumen: 100lm-150lm/W

Voltage: 100-277V/185-265V

CRI > 80 PF>0.90/0.5

LED T8 Tube



PC(Flame-resist)



T8 LED Tube **60cm**

Power: 9W

Lumen: 100-150lm/w

Material: PC (Flame-Resist)

Voltage: 100-277V/185-265V

CRI >80 PF>0.90/0.5

T8 LED Tube **120cm**

Power: 18W

Lumen: 100-150lm/w

Material: PC (Flame-Resist)

Voltage: 100-277V/185-265V

CRI >80 PF>0.90/0.5

T8 LED Tube **150cm**

Power: 24W

Lumen: 100-150lm/w

Material: PC (Flame-Resist)

Voltage: 100-277V/185-265V

CRI > 80 PF>0.9/0.5

LED T8 Tube

Glass



LED T8 Tube

T8 LED Tube 60cm

Material: GLASS
Power: 9W
Lumen: 100-150lm/W
Voltage: 100-277V
CRI> 80 PF>0.9/0.5

T8 LED Tube 120cm

Material: GLASS
Power: 18W
Lumen: 100-150lm/W
Voltage: 100-277V
CRI> 80 PF>0.9/0.5

T8 LED Tube 150cm

Material: GLASS
Power: 24W
Lumen: 100-150lm/W
Voltage: 100-277V
CRI> 80 PF>0.9/0.5

T5



LED T5 Tube

T5 LED Tube **549mm**

Power: 8-9W

Lumen: 100lm-150lm/W

Material: Aluminum&PC

Voltage: 100-277V/185-265V

CRI >80 PF>0.90/0.5

T5 LED Tube **949mm**

Power: 16-20W

Lumen: 100lm-150lm/W

Material: Aluminum&PC

Voltage: 100-277V/185-265V

CRI >80 PF>0.90/0.5

T5 LED Tube **1149cm**

Power: 22-25W


Lumen: 100lm-150lm/W

Material: Aluminum&PC

Voltage: 100-277V/185-265V

CRI > 80 PF>0.90/0.5

T5 Fixture



22.5



T5 Fixture 305mm

Power: 4W

Lumen: 100lm-150lm/W

Material: Aluminum & PC

Voltage: 100-277V/185-265V

CRI >80 PF>0.90/0.5

T5 Fixture 570mm

Power: 8W

Lumen: 100lm-150lm/W

Material: Aluminum&PC

Voltage: 100-277V/185-265V

CRI >80 PF>0.90/0.5

T5 Fixture 870mm

Power: 12W

Lumen: 100lm-150lm/W

Material: Aluminum&PC

Voltage: 100-277V/185-265V CRI > 80

PF>0.90/0.5

T5 Fixture 1170mm

Power: 16W

Lumen: 100lm-150lm/W

Material: Aluminum&PC

Voltage: 100-277V/185-265V CRI > 80

PF>0.90/0.5

LED T5 Tube

LED TRI-PROOF LIGHT



Model	Dimension(mm)	Watt	Material	Lumen	Volt	PF
NR-TROS-60D	600x105x78	20W	PC+PC	2000lm	100-277v	0.5/0.9
NR-TROS-120D	1200x105x78	40W		4000lm	100-277v	0.5/0.9
NR-TROS-150D	1500x105x78	60W		6000lm	100-277v	0.5/0.9
NR-TROS-60S	600x68x78	10W	ABS+PC	1000lm	100-277v	0.5/0.9
NR-TROS-120S	1200x68x78	20W		2000lm	100-277v	0.5/0.9
NR-TROS-150S	1500x68x78	30W		3000lm	100-277v	0.5/0.9

LED TRI-PROOF LIGHT



Model	Dimension (mm)	Watt	Material	Lumen	Volt	PF
NR-TRGS-60D	656x115x90	18W	PC+PC ABS+PC	1800lm	100-277v	>0.9/0.5
NR-TRGS-120D	1260x115x90	36W		3600lm	100-277v	>0.9/0.5
NR-TRGS-150D	1560x115x90	48W		4800lm	100-277v	>0.9/0.5
NR-TRGS-60S	600x68x78	10W		1000lm	100-277v	>0.9/0.5
NR-TRGS-120S	1200x68x78	20W		2000lm	100-277v	>0.9/0.5

LED TRI-PROOF LIGHT



For
LED
Tube

Model	Dimension(mm)	Material	IP	Clips
NR-TRO-218	660x135x94	PC+PC ABS+PC ABS+PS	65	4pcs
NR-TRO-236	1268x135x94		65	8pcs
NR-TRO-258	1562x135x94		65	12pcs
NR-TRO-118	660x85x94		65	4pcs
NR-TRO-136	1268x85x94		65	8pcs
NR-TRO-158	1562x85x94		65	12pcs

LED Linear Light




Model	Power	Volt	Lumen	CRI	Material	Size(mm)
NR-BL-300	9W	85-265V	700lm	80	PC & Iron/ Aluminum	300x75x25
NR-BL-600	18W	85-265V	1350lm	80		600x75x25
NR-BL-900	27W	85-265V	2000lm	80		900x75x25
NR-BL-1200	36W	85-265V	2700lm	80		1200x75x25

LED Linear Light - Linkable



Model	Power	Volt	Lumen	CRI	Material	Size(mm)
NR-LB-600	20W	85-265V	1700lm	80	PC & Aluminum	600x60x40
NR-LB-1200	40W	85-265V	3400lm	80		1200x60x40


Office Lighting Series

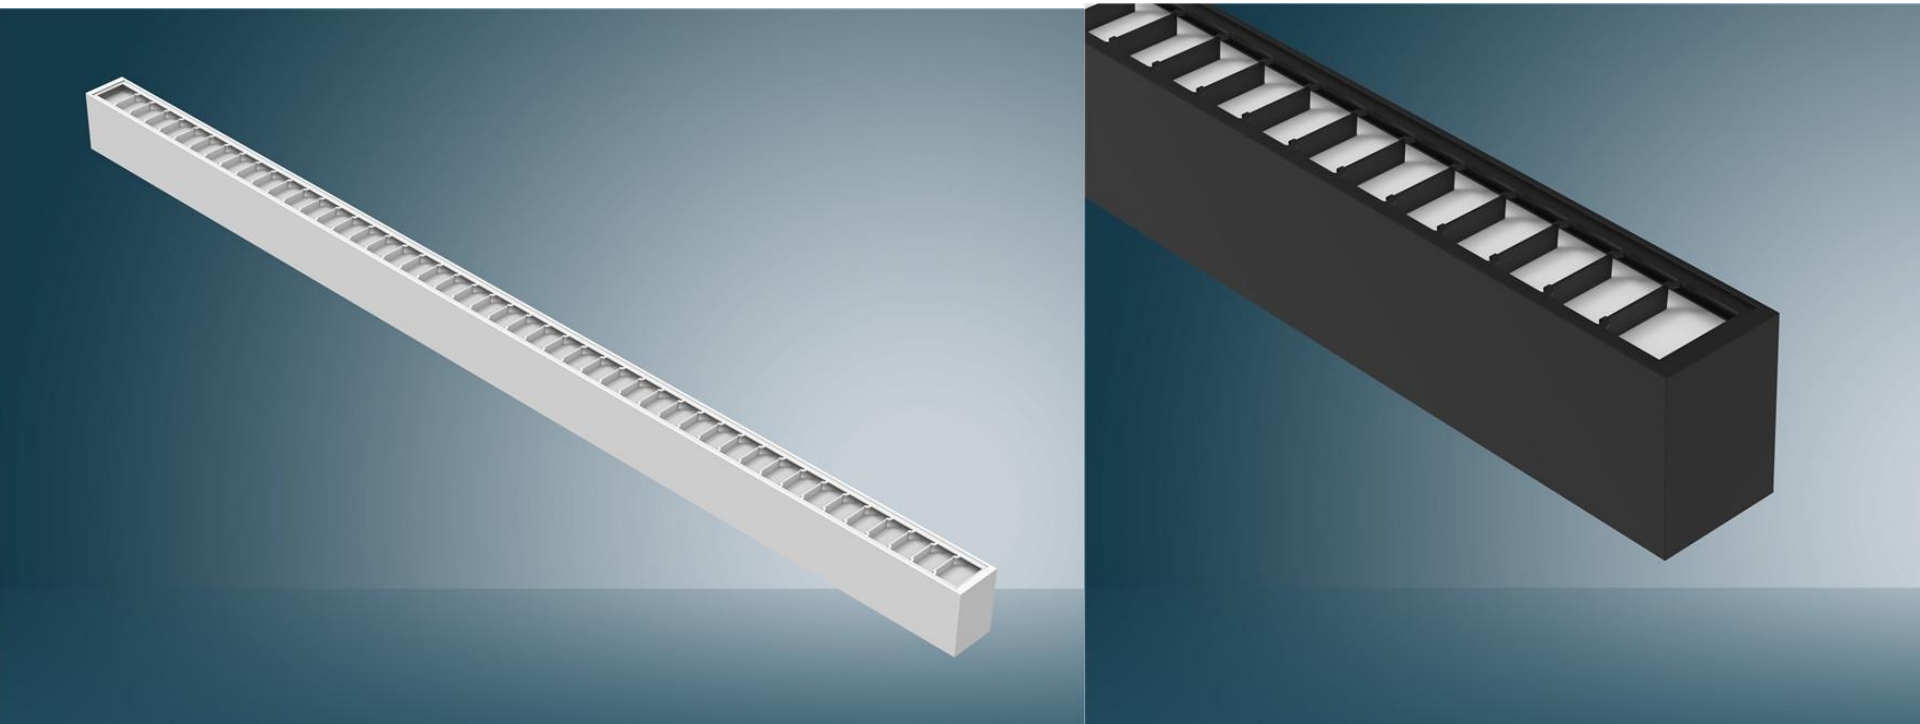

Model	Power	Lumen	Material	Product size	Functions
NR-L6378-60	24W	100-120lm/w	Aluminum+PC	L60xW63xH78mm	1-10V,DALI, CCT changing. Suspension/ surface mount
NR-L6378-120	40W	100-120lm/w	Aluminum+PC	L1200xW63xH78mm	
NR-L6378-150	50W	100-120lm/w	Aluminum+PC	L1500xW63xH78mm	

Office Lighting Series

NOUR

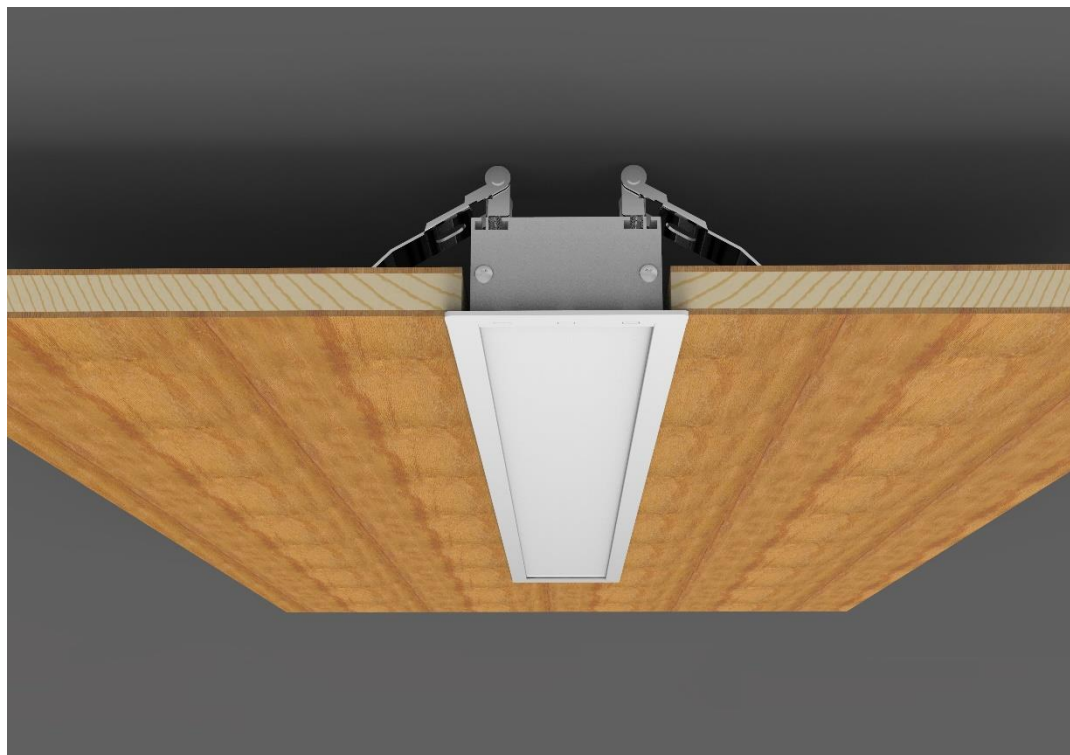

Model	Power	Lumen	Material	Product size	Functions
NRC-9035-60	24W	100-120lm/w	Aluminum+PC	90*35*600mm	1-10V,DALI, CCT changing. Recessed-mount.
NRC-9035-120	40W	100-120lm/w	Aluminum+PC	90*35*1200mm	
NRC-9035-150	50W	100-120lm/w	Aluminum+PC	90*35*1500mm	

LED Panel Light



Model	Power	Volt	Lumen	CRI	Material	Size(mm)
NR-DLA-3WR	3W	85-265V	200lm	80	Aluminum +PS/PMMA	ø85x12
NR-DLA-6WR	6W	85-265V	400lm	80		ø120x12
NR-DLA-9WR	9W	85-265V	720lm	80		ø145x12
NR-DLA-12WR	12W	85-265V	960lm	80		ø170x12
NR-DLA-15WR	15W	85-265V	1200lm	80		ø200x12
NR-DLA-18WR	18W	85-265V	1440lm	80		ø225x12
NR-DLA-24WR	24W	85-265V	1920lm	80		ø300x12

LED Panel Light



Model	Power	Volt	Lumen	CRI	Material	Size(mm)
NR-DLA-3WS	3W	85-265V	200lm	80	Aluminum +PS/PMMA	85x85x12
NR-DLA-6WS	6W	85-265V	400lm	80		120x120x12
NR-DLA-9WS	9W	85-265V	720lm	80		145x145x12
NR-DLA-12WS	12W	85-265V	960lm	80		170x170x12
NR-DLA-15WS	15W	85-265V	1200lm	80		200x200x12
NR-DLA-18WS	18W	85-265V	1440lm	80		225x225x12
NR-DLA-24WS	24W	85-265V	1920lm	80		300x300x12

LED Panel Light



Model	Power	Volt	Lumen	CRI	Material	Size(mm)
NR-DLB-6WR	6W	85-265V	400lm	80	Aluminum +PS/PMMA	ø120x32
NR-DLB-12WR	12W	85-265V	960lm	80		ø170x32
NR-DLB-18WR	18W	85-265V	1440lm	80		ø225x32
NR-DLB-24WR	24W	85-265V	1920lm	80		ø300x32


LED Panel Light




Model	Power	Volt	Lumen	CRI	Material	Size(mm)
NR-DLB-6WS	6W	85-265V	400lm	80	Aluminum +PS/PMMA	120x120x32
NR-DLB-12WS	12W	85-265V	960lm	80		170x170x32
NR-DLB-18WS	18W	85-265V	1440lm	80		225x225x32
NR-DLB-24WS	24W	85-265V	1920lm	80		300x300x32

IP54 2in1 Panel Light

NOUR

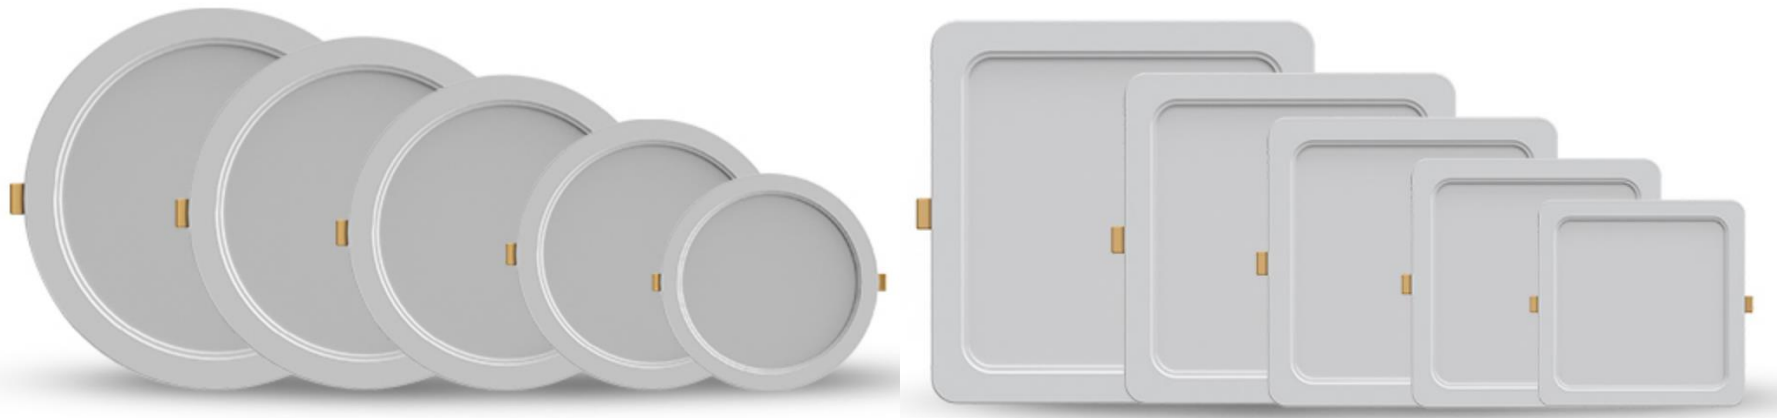


IP54 2in1 Panel Light

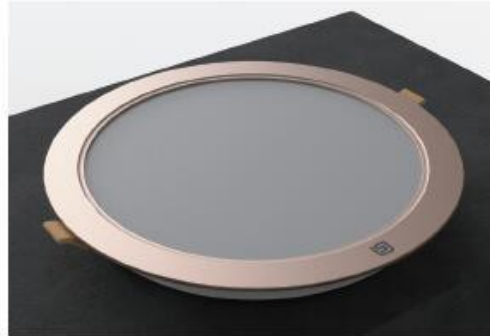



Model	Material	Lumen	Size	Cutout	IP	Volt	
NR-DLCR-5W	PC+PS	85/100/120lm/W	95x26mm	ø75-90mm	54/20	100-240V	
NR-DLCR-9W	PC+PS	85/100/120lm/W	120x26mm	ø100-115mm	54/20	100-240V	
NR-DLCR-12W	PC+PS	85/100/120lm/W	145x26mm	Ø125-140mm	54/20	100-240V	
NR-DLCR-18W	PC+PS	85/100/120lm/W	170x26mm	Ø150-165mm	54/20	100-240V	
NR-DLCR-24W	PC+PS	85/100/120lm/W	225x26mm	Ø205-220mm	54/20	100-240V	

LED Non-Frame Panel

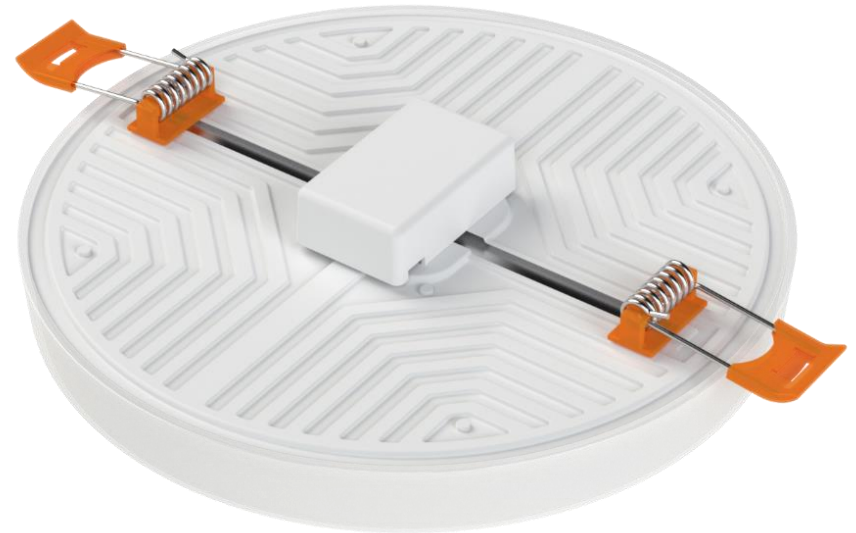


Model	Material	Lumen	Size	Cutout	IP	Volt	
NR-DLDR-12W	Aluminum + PC	100lm/W	90x20mm	Free Size	20	100-240V	
NR-DLDR-18W	Aluminum + PC	100lm/W	120x20mm	Free size	20	100-240V	
NR-DLDR-24W	Aluminum + PC	100lm/W	170x20mm	Free size	20	100-240V	
NR-DLDR-36W	Aluminum + PC	100lm/W	225x20mm	Free size	20	100-240V	

LED Non-Frame Panel

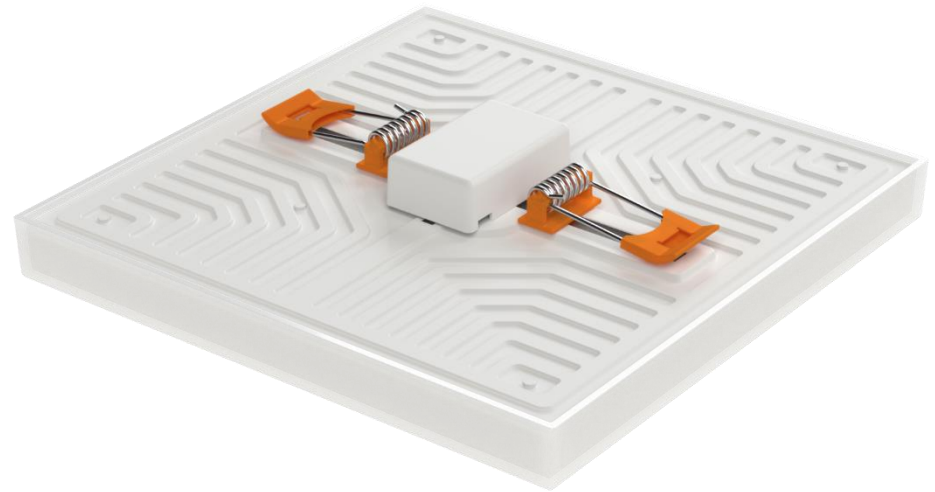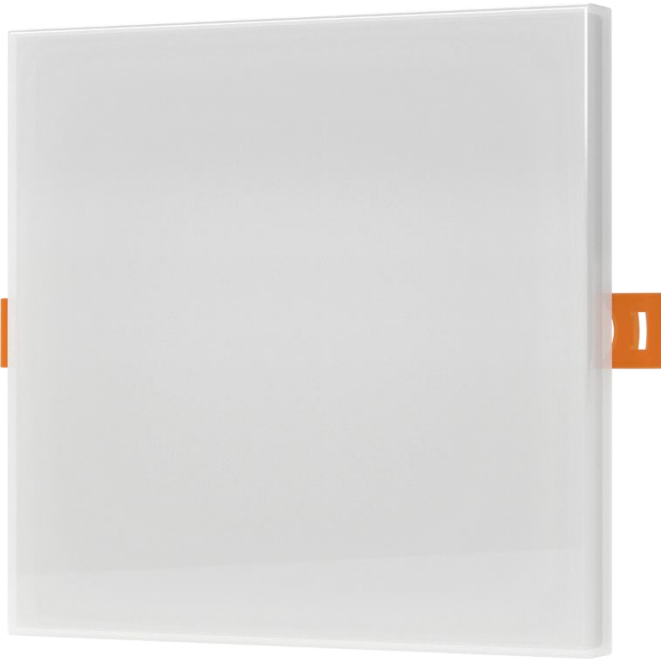

Model	Material	Lumen	Size	Cutout	IP	Volt	
NR-DLDS-12W	Aluminum + PC	100lm/W	90x90x20mm	Free Size	20	100-240V	
NR-DLDS-18W	Aluminum + PC	100lm/W	120x120x20mm	Free size	20	100-240V	
NR-DLDS-24W	Aluminum + PC	100lm/W	170x170x20mm	Free size	20	100-240V	
NR-DLDS-36W	Aluminum + PC	100lm/W	225x225x20mm	Free size	20	100-240V	

LED PANEL LIGHT

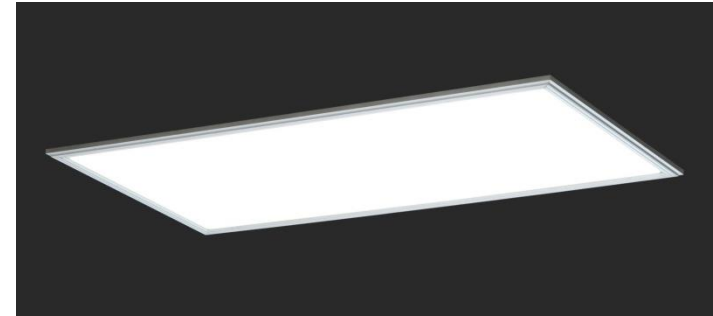

Model	Watt	Lumen	CRI	Volt	PF	Material	Size(mm)
NR-PLA3060	24W	1920lm	80	85-265V	0.9/0.5	Alu.+PC	295x595x10/12
NR-PLA6060	40W	3200lm	80	85-265V	0.9/0.5	Alu.+PC	600x600x10/12
NR-PLA6060	60W	4800lm	80	85-265V	0.9/0.5	Alu.+PC	600x600x10/12
NR-PLA30120	40W	3200lm	80	85-265V	0.9/0.5	Alu.+PC	300x1200x10/12
NR-PLA30120	60W	4800lm	80	85-265V	0.9/0.5	Alu.+PC	300x1200x10/12
NR-PLA60120	60W	4800lm	80	85-265V	0.9/0.5	Alu.+PC	600x1200x10/12
NR-PLA60120	72W	5760lm	80	85-265V	0.9/0.5	Alu.+PC	600x1200x10/12

LED BACK-LIT PANEL

NOUR



Model	Watt	Lumen	CRI	Volt	PF	Material	Size(mm)
NR-PLB3060	24W	1920lm	80	85-265V	0.9/0.5	Iron+PS	295x595x30
NR-PLB6060	40W	3200lm	80	85-265V	0.9/0.5	Iron+PS	600x600x30
NR-PLB6060	60W	4800lm	80	85-265V	0.9/0.5	Iron+PS	600x600x30
NR-PLB30120	40W	3200lm	80	85-265V	0.9/0.5	Iron+PS	300x1200x30
NR-PLB30120	60W	4800lm	80	85-265V	0.9/0.5	Iron+PS	300x1200x30
NR-PLB60120	60W	4800lm	80	85-265V	0.9/0.5	Iron+PS	600x1200x30
NR-PLB60120	72W	5760lm	80	85-265V	0.9/0.5	Iron+PS	600x1200x30

LED Panel Light

NOUR



Model	Power	RA	Volt	LM	PF	Driver	Size
NR-600R	48W	80	85-265V	4080lm	>0.9	No-flicker	ø600x38/28mm
NR-500R	40W	80	85-265V	3200lm	>0.9	No-flicker	ø500x38/28mm
NR-400R	30W	80	85-265V	2550lm	>0.9	No-flicker	ø400x38/28mm

LED Panel Light



Model	Power	RA	Volt	LM	PF	Driver	Size
NR-600R	48W	80	85-265V	4080lm	>0.9	No-flicker	ø600x38/28mm
NR-500R	40W	80	85-265V	3200lm	>0.9	No-flicker	ø500x38/28mm
NR-400R	30W	80	85-265V	2550lm	>0.9	No-flicker	ø400x38/28mm

LED Ceiling Lamp



LED Ceiling Lamp



Model	Power	Size(mm)	Lumen	RA	Volt	PF	IP	Functions
NR-XT-12	12W	Ø260-280	960lm	>80	85-265V	>0.50	20/54	3CCT Dimmable Wifi Motion/ Optical Control
NR-XT-18	18W	Ø280-350	1268lm	>80	85-265V	>0.50	20/54	
NR-XT-24	24W	Ø350-380	2050lm	>80	85-265V	>0.50	20/54	
NR-XT-36	36W	Ø400-480	2800lm	>80	85-265V	>0.90	20/54	
NR-XT-48	48W	Ø480-520	3600lm	>80	85-265V	>0.90	20/54	
NR-XT-58	58W	Ø480-520	4500lm	>80	85-265V	>0.90	20/54	

Office Lighting Series

NOUR



Model	Power	Lumen	Material	Product size	Functions
NREW-T1	24W/40W	1920/3200lm	PMMA &Alu	600x300x10mm	Dimming/ 3CCT/PIR
NREW-T2	40W	3600lm	PMMA &Alu	1200x300x10mm	

Office Lighting Series


NOUR



Model	Power	Lumen	Material	Product size	Functions
NREW-T3	24W	1920lm	PMMA &Alu.	600x50mm 1200x200x7mm	Dimming/ 3CCT/PIR
NREW-T5	40W	3600lm	PMMA &Alu.		

UFO HIGH BAY

NOUR

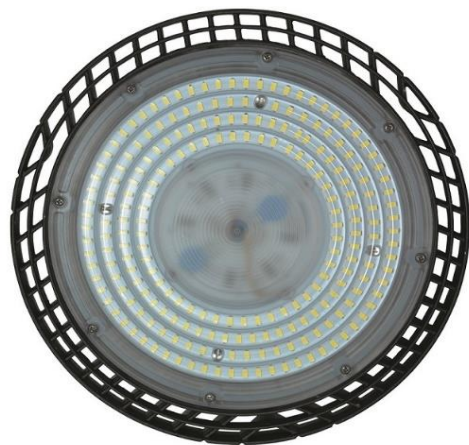

Model	Size(mm)	Beam Angle	Lumen Output	Input Voltage	PF	IP
NR-HBB-100	D247X30.5	60° /90° /120°	10000LM	AC85-277V	>0.9	65
NR-HBB-150W	D257X36	60° /90° /120°	15000LM	AC85-277V	>0.9	65
NR-HBB-200W	D269X41.5	60° /90° /120°	20000LM	AC85-277V	>0.9	65
NR-HBB-240W	D269X41.5	60° /90° /120°	24000LM	AC85-277V	>0.9	65

LED Flood Light

NOUR



Model	Watt	Lumen	Volt/PF	IP	Size(mm)
NR-FLA-10WB	10W	800lm	85-265V/0.9	65	90x70X21mm
NR-FLA-20WB	20W	1600lm	85-265V/0.9	65	107x80X28mm
NR-FLA-30WB	30W	2400lm	85-265V/0.9	65	130x95X28mm
NR-FLA-50WB	50W	4000lm	85-265V/0.9	65	160x120X28mm
NR-FLA-50WB	100W	8000lm	85-265V/0.9	65	234x174X31.5mm
NR-FLA-100WB	150W	12000lm	85-265V/0.9	65	280x205X40.5mm
NR-FLA-150WB	200W	18000lm	85-265V/0.9	65	350x260X42mm
NR-FLA-200WB	300W	27000lm	85-265V/0.9	65	395x295X42.5mm
NR-FLA-300WB	400W	36000lm	85-265V/0.9	65	450x330X42.5mm



LED FLOOD LIGHT

Solar Flood Light

NOUR



Model	watt	Material	Battery	Solar PV(W)	Panel Size(mm)	Charging Time	Working Time	Working Temp	Feature
NR-SFLA-40	40W	Die-casting Aluminum	3.2V 5AH	6V/8W	250x205x17	3-4 hours Under good sunshine.	12 hours Per day	- 35°C to 80°C	Optical Control; Remote Control; Control Board, battery replaceable
NR-SFLA-60	60W		3.2V 10AH	6V/10W	310x200x17				
NR-SFLA-100	100W		3.2V 15AH	6V/15W	250x370x17				
NR-SFLA-200	200W		3.2V 25AH	6V/25W	380x370x17				
NR-SFLA-300	300W		3.2V 30AH	6V/36W	546x370x17				

Solar Street Light

NOUR



Model	watt	Product Size(mm)	Battery	Solar PV(W)	Panel Size(mm)	Charging Time	Working Time	Working Temp	Feature
NR-SSTA-20	20W	495*212*60	3.2V 5AH	6V/8W	350*200*17	3-4 hours Under good sunshine.	12 hours per day	- 35°C to 80°C	Optical Control; Remote Control; Control Board, battery replaceable
NR-SSTA-30	30W	495*212*60	3.2V 10AH	6V/12W	350*240*17				
NR-SSTA-50	50W	495*212*60	3.2V 15AH	6V/17W	350*350*17				
NR-SSTA-100	100W	495*212*60	3.2V 20AH	6V/23W	350*450*17				
NR-SSTA-150	150W	495*212*60	3.2V 25AH	6V/28W	350*520*17				
NR-SSTA-200	200W	495*212*60	3.2V 30AH	6V/30W	350*620*17				
NR-SSTA-300	300W	495*212*60	3.2V 35AH	6V/35W	350*620*17				

Our Partners





Mobile Terminal



WhatsApp



WeChat

Ningbo Nour Lighting Technology Co.,Ltd

ADD: No.66, Yongmao Road, Zhenhai District, Ningbo, China

TEL: 86-574-86653997 Mob/WhatsApp/Wechat: 86-13884402346

Email: windsor@nour-led.com