



Ningbo Nour Lighting Technology Co.,Ltd


PRODUCT: LED TRI-PROOF LAMP

Designer: Product manage

SKU CODE: NR-TROS60/120/150

Date: 2020/8/20

PICTURE and DIMENSIONS

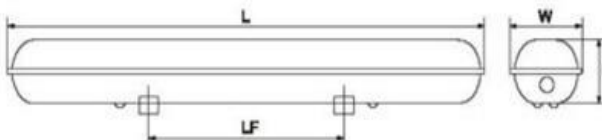

L (mm)	W (mm)	H (mm)	LF (mm)
600	105	78	260
1200	105	78	810
1500	105	78	1110

Description and Applications

- 1) PC Cover and PC housing or PC Cover and ABS housing for different applications. Appearing a high-end design look.
- 2) Wall/ceiling/suspended mounted. Ideal for continuous row mounting. Multi purpose bracket allows for surface/suspended mounting.
- 3) High Quality/Brightness LEDs used at 100LM/W with LM80 Test Report.
- 4) IC Drive with high safety and reliability; Compatible with Emergency kit, lasting 120mins.
- 5) IP65 gear compartment. High degree of hermeticity, IP65 (protection against dust and 0,3bar to 3m pressure water jets penetration).
- 6) Milky PC cover used; No visible LED dots appearing.
- 7) Application: Workshops, Warehouse, Tunnels, Garages, Humid dusty areas, etc.
- 8) 2 Years Warranty. 25,000 hours lifetime.

SPECIFICATIONS

Size	Power	Input Voltage	PF	CCT	CRI	lm Output	LED Qty
600x105x78cm	20W	AC100-265V/ 180-265V	>0.9/0.5	3000-6500K	>80/70	2000LM	144PCS
1200x105x78cm	40W	AC100-265V/ 180-265V	>0.9/0.5	3000-6500K	>80/70	4000LM	288PCS
1500x105x78cm	60W	AC100-265V/ 180-265V	>0.9/0.5	3000-6500K	>80/70	6000LM	432PCS


Wavelength Range (nm or K)

Red(nm)	Green(nm)	Blue(nm)	Yellow(nm)	Orange(nm)	C.W(K)	N.W(K)	W.W(K)
620~630	515~525	465~475	585~595	605~615	5500~6500	4000-4500K	2700~3500

Environment Parameters

Operating Temperature	-20℃ ~ +50℃
Storage Temperature	-40℃ ~ +60℃
IP Rating	IP65
IES	Available

Intergrating Sphere Testing Report

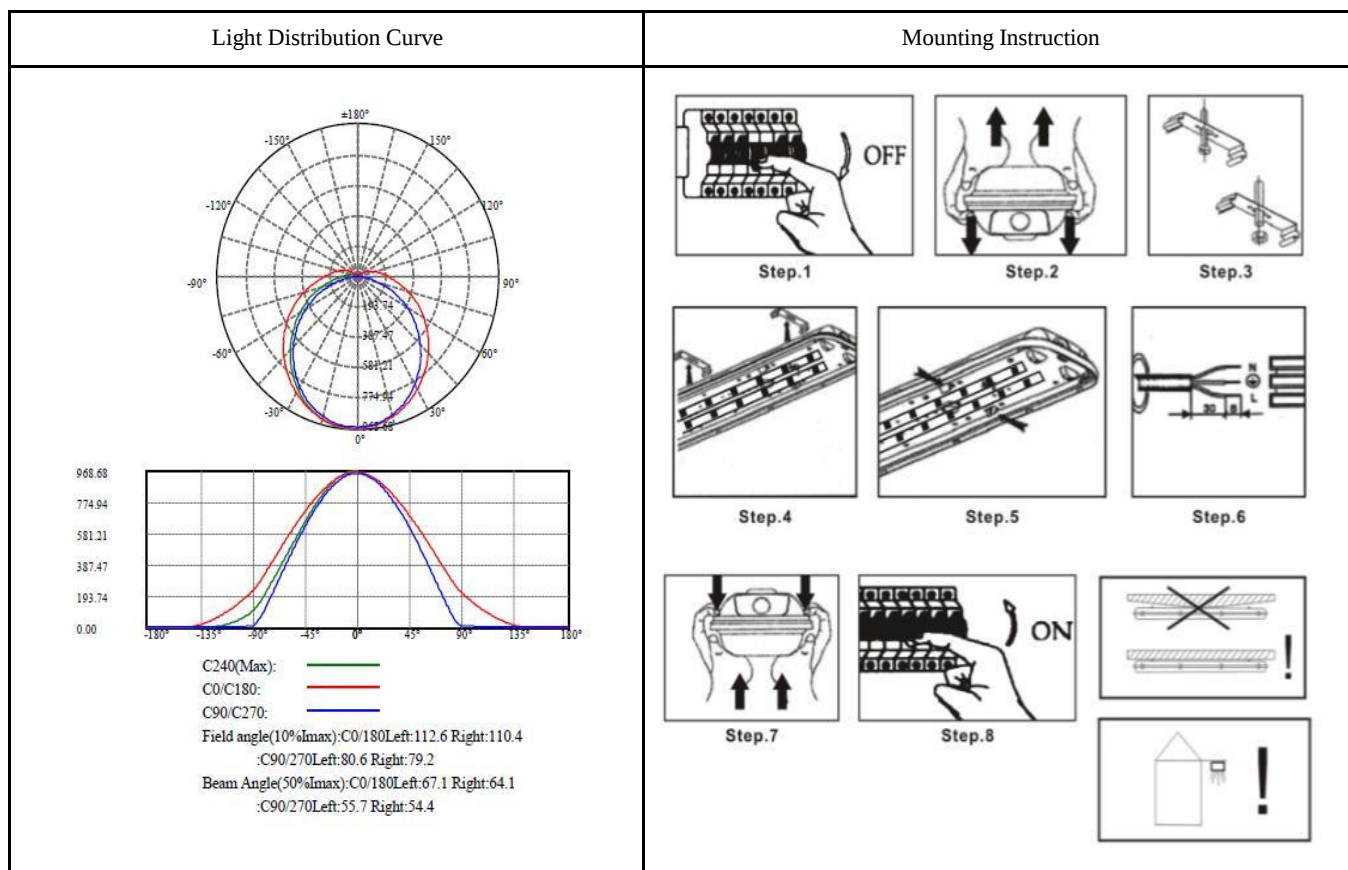

PACKING DETAILS

Model	Item N.W.	Item G.W.	Box Size (mm)	PCS/CTN	CTN Size(cm)	CBM/CTN(m ³)	G.W.(KG)
GLOS60	0.85kgs	1.0kgs	660x110x82	8	62.5*36.5*24.5	0.056	9kgs
GLOS120	1.5kgs	1.7kgs	1260x110x82	8	122.5*36.5*24.5	0.11	14kgs
GLOS150	1.85kgs	2.2kgs	1560x110x82	6	152.5*36.5*24.5	0.136	13.5kgs
PCS/20GP(1200mm)		PCS/40GP(1200mm)		PCS/40HQ (1200mm)			
2040PCS	255CTN	4080PCS	510CTN	4944PCS	618CTN		

PACKAGING

REFERENCE PHOTO	ACCESSORIES
	